



Advanced Air Mobility: The new flying

Final document



Ministerie van Infrastructuur
en Waterstaat

April 20, 2022

Contents

Executive summary	3
A. Background and methodology	5
B. Introduction of Advanced Air Mobility	9
C. Implications for The Netherlands and Western Europe	26
D. Required actions for the government and the top sectors	40

This document shall be treated as confidential. It has been compiled for the exclusive internal use by our client and is not complete without the underlying detailed analyses and the oral presentation. It must not be passed on and/or must not be made available to third parties without prior written consent from Roland Berger.

Executive summary (1/2)

A Background and methodology

- Roland Berger was asked to provide insight how eC/VTOL aircrafts can contribute to zero-emission mobility and to determine the focus areas for the Ministry and top sectors
- People from a variety of backgrounds (industry, government, academia) have been involved in the project through three workshops

B Introduction of Advanced Air Mobility

- Society faces a number of mobility challenges and opportunities – Advanced Air Mobility (AAM) can add a new mobility dimension and complement the existing systems
 - It is expected that AAM will allow people and cargo to hop on and off comfortably and quickly fly to many regional destinations
 - For many people in The Netherlands there is an airport at less than 20 minutes – Vertiports will ensure total coverage
- Advanced Air Mobility can be defined as regional short-haul flights with manned and unmanned aircraft systems for passenger and cargo applications
 - Multiple electric aircraft configurations exist, each with different characteristics that have significant influence on performance
 - Over 100 AAM aircrafts are currently in development using new electric conventional and VTOL aircrafts – Europe accounts for 46%
- Adoption of Advanced Air Mobility is driven by social-cultural factors, technology, infrastructure, economics and regulation
 - Sustainability, social integration, safety and noise/visual pollution are crucial social-cultural factors for AAM adoption: If safe, sustainable, low-noise, green (air) mobility solutions are available this can improve connectivity of regions and replace polluting planes
 - Flight, propulsion and control technology are the three areas that drive AAM adoption from a technology point of view
 - AAM requires three levels of infrastructure: physical, digital and ground transport integration
 - AAM is not likely to be the cheapest and most energy efficient alternative, but is expected to be cost-competitive with traditional air transport
 - Required regulatory approvals relate to the aircraft, MRO, operations and various others
- Non-passenger transport is expected to have greater near-term adoption as result of lower technological and regulatory barriers

Executive summary (2/2)

C Implications for The Netherlands and Western Europe

- A wide variety of passenger and non-passenger applications exist for AAM in The Netherlands and Western Europe
- Two selected use-cases have been detailed: regional air mobility up to 250 km (eVTOL) and Air Traffic Electrification up to 1,000 km (eSTOL and eCTOL)
- RAM consists of scheduled passenger transport and can increase accessibility by offering sustainable transport options
 - It is estimated that 20-40 k passengers per day will use eVTOL transport in 2050 for which 700-1,400 aircrafts are required, predominantly tilt wing
 - The addressable area for eVTOL is between 50-250 km – For Utrecht, cities such as The Hague, Deventer, Middelburg and Cologne would be in range
 - 20-40 k passengers per day are expected to use eVTOLs by 2050 – The switch rate is expected to be higher for longer distances
 - 700 to 1,400 eVTOLs are expected for RAM in 2050 based on the estimated 20-40 k eVTOL movements in 2050
 - Effects and considerations of eVTOL as a tourism shuttle to the Efteling have been assessed – Potential other use cases (e.g. Wadden) to be assessed
- Air traffic can be partly electrified by eSTOL and eCTOL to create sustainable alternatives for conventional air traffic while increasing accessibility
 - It is estimated that 4-14 k passengers per day will use eSTOL and eCTOL transport in 2040 for which 110-310 aircrafts are required
 - The addressable area for eSTOL and eCTOL is up to 1,000 km – Cities such as London, Manchester, Prague and Oslo would be in range
 - The demand in 2040 is estimated to be 2.5-12 k passengers per day based on the current number of movements and a switch rate between 0-20%
 - 60-260 required eSTOLs/eCTOLs are expected for Air Traffic Electrification in 2040 based on the estimated 2.5-12 k eSTOL/eCTOL movements in 2040
 - Passenger transport by eCTOL en eSTOL could start to kick in with piloted aircrafts around 2030

D Required actions for the government and the top sectors

- Government's key responsibilities are regulation, infrastructure and social-cultural factors while top sectors must focus on technology and economics
- Concrete next steps are identified for the government and top sectors to accelerate development of Advanced Air Mobility in the short-term
 - Program further research on AAM
 - Research public opinion on AAM
 - Bring together relevant stakeholders to accelerate AAM technology development
 - Stimulate research on AAM
 - Develop required AAM regulations with EASA
 - Map infrastructure requirements for AAM in NL



A. Background and methodology



Ministerie van Infrastructuur
en Waterstaat

RB was asked to provide insight how eC/VTOL aircrafts can contribute to zero-emission mobility and to determine the focus areas for the Ministry and top sectors

Background and goal

Background

- With the **rise of 'the new flying'** (electric drones – eVTOL¹⁾ aircrafts), new possibilities are added to our mobility system
- It is now **difficult to imagine** what regional or urban air mobility could look like with large-scale application and to what extent this form of mobility will have an **impact on space, mobility and the economy**
- Roland Berger is asked for support in **providing insight** how eC/VTOL aircrafts can contribute to making **zero-emission mobility** possible on a large scale
- This project was conducted in a **short-time span** of a few weeks limiting thorough analysis on the vast number of factors influencing advanced air mobility



Goal of the project



Determine the **focus areas** for the Ministry and the top sectors with the mission of a **public-private arrangement** that serves, among other things, the "**Klimaatakkoord**" and all parties that have committed to it

1) Electric vertical take-off and landing

People with diverse backgrounds have been involved in the project – In total three workshops have been organized

Overview of people involved

Group	Name	Organization
Project team		MinlenW
		MinlenW
		MinlenW
	Jeroen Kroonen	MissieTeam Dplus
	Casper Veenman	Roland Berger
Sounding board	Niek Cuperus	Roland Berger
	Roel Hellemons	Airport Eindhoven
		MinlenW
		MinlenW
	Arjan Vergouw	MissieTeam Dplus
Workshop participants	Martin Nagelsmit	NLR
	Dean Boljuncic	Airport Eindhoven
	Gijs Vrenken	Airport Eindhoven
	Sjoerd Berning	Bayards
	Wesley Poland	Bayards
	Maurice Boogerd	Corendon
	Chris Popps	Fokker
	Michiel Wevers	Fokker
	Idius Greving	Fundashon Mariadal
	Martine Verweij	Greenbridges

Group	Name	Organization
Workshop participants	Kyara Metz	LVNL
	Frans Sengers	Milieu Centraal
		MinlenW
		MinlenW
		MinlenW
		MinlenW
		MinlenW
		MinlenW
	Robbert Jan Kooij	Oost NL
	Robert Dingemanse	PAL-V
	Jaap Hatenboer	RAV
		RWS
	Geert Boosten	Stichting Duurzaam Vliegen
	Mark Rademaker	Stichting Duurzaam vliegen
	Tim te Velde	Stichting Duurzaam vliegen
	Yanniek Huisman	Stichting RHIA
	Matthijs de Haan	Teuge Airport
	Toon Meelen	Universiteit Utrecht
	Joost Dieben	Venturi

To support legibility, the report contains numerous abbreviations

List of abbreviations

Abbreviation	Meaning
#	Number
%	Percentage
/	Per
~	Approximately
<	Smaller than
>	Larger than
Σ	Total
AAM	Advanced air mobility
ATE	Air traffic electrification
BE	Belgium
c	Circa
CBS	Centraal Bureau voor de Statistiek
CO2	Carbon dioxide
DG	Directoraat-generaal
DOA	Design organization approval
e.g.	Exempli gratia (for example)
EASA	European Union Aviation Safety Agency
eCTOL	Electric conventional take-off and landing
eSTOL	Electric short take-off and landing
eVTOL	Electric vertical take-off and landing
excl	Excluding

Abbreviation	Meaning
h	Hour
I&W	Infrastructure and Water management
i.e.	Id est (that is)
incl	Including
k	Thousand
kg	Kilograms
km	Kilometers
max	Maximum
min	Minimum
min	Minutes
MOA	Maintenance organization approval
n/a	Not applicable
NL	The Netherlands
POA	Product organization approval
RAM	Regional air mobility
RB	Roland Berger
Top sec	Top sectors
UAV	Unmanned aerial vehicle
US	United States
W-EU	Western Europe



B. Introduction of Advanced Air Mobility



Ministerie van Infrastructuur
en Waterstaat

Advanced Air Mobility can add a new mobility dimension and complement the existing systems

The opportunities for Advanced Air Mobility

Mobility challenges



Environmental effects of mobility



Congestion increases traffic fatalities and long commute times



Mobility infrastructure is increasingly **costly** and using up more and **more space**

Opportunities



Technological developments bring new opportunities (e.g. less emission, better noise control, lower cost)

One of the potential answers

Advanced Air Mobility



Advanced Air Mobility adds a new mobility dimension and complements existing systems

It is expected that AAM will allow people and cargo to hop on and off comfortably and quickly fly to many regional destinations

The Customer Journey

1



BOOK IT

Book spontaneously, even while on your way to the airport, or schedule in advance

2



HOP ON

Never miss a beat. Get dropped off right next to the plane or walk through a small building or gate

3



SIT BACK

Relax or be productive – no need to keep your eyes on the road

4



HOP OFF

Go directly to an automatically arranged waiting rideshare or parked car

For many people in The Netherlands there is an airport at less than 20 minutes – Vertiports would ensure total coverage

Coverage (20-min) of airports in The Netherlands

Airports¹⁾ (today)



Vertiports added (future potential)



- There already is an airport at less than 20 minute for most people in The Netherlands
- Once vertiports are added, take-off and landing locations come even closer and accessibility is increased
- This would allow all people in The Netherlands to arrive at take-off and landing locations within 20 minutes

1) Excluding heliports

Advanced Air Mobility can be defined as regional short-haul flights with manned and unmanned aircraft systems for passenger and cargo applications

Advanced Air Mobility



Advanced Air Mobility can be defined as **electric conventional¹⁾** and **vertical take-off and landing (VTOL)** for **short flights** with a **radius of 80-km²⁾** and **intraregional flights of hundreds kms³⁾** between urban and rural areas



It does not include

- Conventional helicopters
- Small drones (typically with a payload <100 kg; not capable of transporting passengers)
- UAVs
- Long distance (autonomous) aircraft



1) Including short take-off and landing (STOL); 2) Range of AAM flights could be shorter for specific use-cases (e.g., emergency medical service); 3) Range could be longer (up to c. 1000 km) in case of electric conventional aircrafts

Multiple electric aircraft configurations exist, each with different characteristics that have significant influence on performance

AAM aircraft architectures – Overview


eVTOL						eSTOL / eCTOL	
	 Multicopter	 Quadrocopter	 Lift & cruise (hybrid)	 Tilt-propeller	 Tilt-wing	 eSTOL	 eCTOL
Disc loading ¹⁾	--	—	~	+	+	++	++
Hoovering efficiency ²⁾	++	+	~	—	—	--	--
Downwash ³⁾ speed & noise level	++	+	~	—	—	--	--
Gust resistance and stability	--	—	~	+	+	++	++
Forward flight speed & efficiency	~60-130 km/h	~130-190 km/h	~130-190 km/h	~140-300 km/h	~140-300 km/h	~140-350 km/h	~300-500 km/h
Approximate range ⁵⁾	30-80 km	up to 150 km	up to 300 km	up to 300 km	up to 500 km	up to 800 km	up to 900 km
Approximate payload ⁶⁾	~200 kg	up to 500 kg	up to 800 kg	up to 800 kg	up to 800 kg	up to 1,000 kg	up to 2,000 kg
Advantages	 Adapted for short trip with frequent hoovering	Design accommodating multiple mission types	- VTOL and STOL⁴⁾ - No tilting mechanism	Combination of VTOL capacity and range	- Reduced mass - VTOL and STOL⁴⁾	Potential greener solution, depending on source of electricity	Potential greener solution, depending on source of electricity
Disadvantages	 Low range and speed	- Energy consumption in cruise - Complex design	- Mass - Unused propellers - Drag in cruise	- High cost and complexity of the tilting mechanism - Complex maneuvers	- High cost and complexity of the tilting mechanism - Complex maneuvers	Requires a runway albeit shorter than conventional aircrafts	Requires conventional runway
Time to market	Fastest certification	n/a	Slower certification	Slowest certification	n/a	n/a	n/a

++ Very high + High ~ Neutral — Low -- Very low

1) Disc loading defined as AAM weight divided by total rotor disc area; 2) Lower disc loading generates improved hovering efficiency; 3) Ground-oriented airflow during lift or landing phases; 4) Also possible as short takeoff and landing (STOL)
5) Expected range at commercial launch; 6) Varies according to number of seats for each concept

Over 100 AAM aircrafts are currently in development using new electric (potentially autonomous) conventional and VTOL aircrafts – Europe accounts for 46%

Distribution of ~280 publicly known electrically propelled aircraft programs, Aug 2021¹⁾²⁾

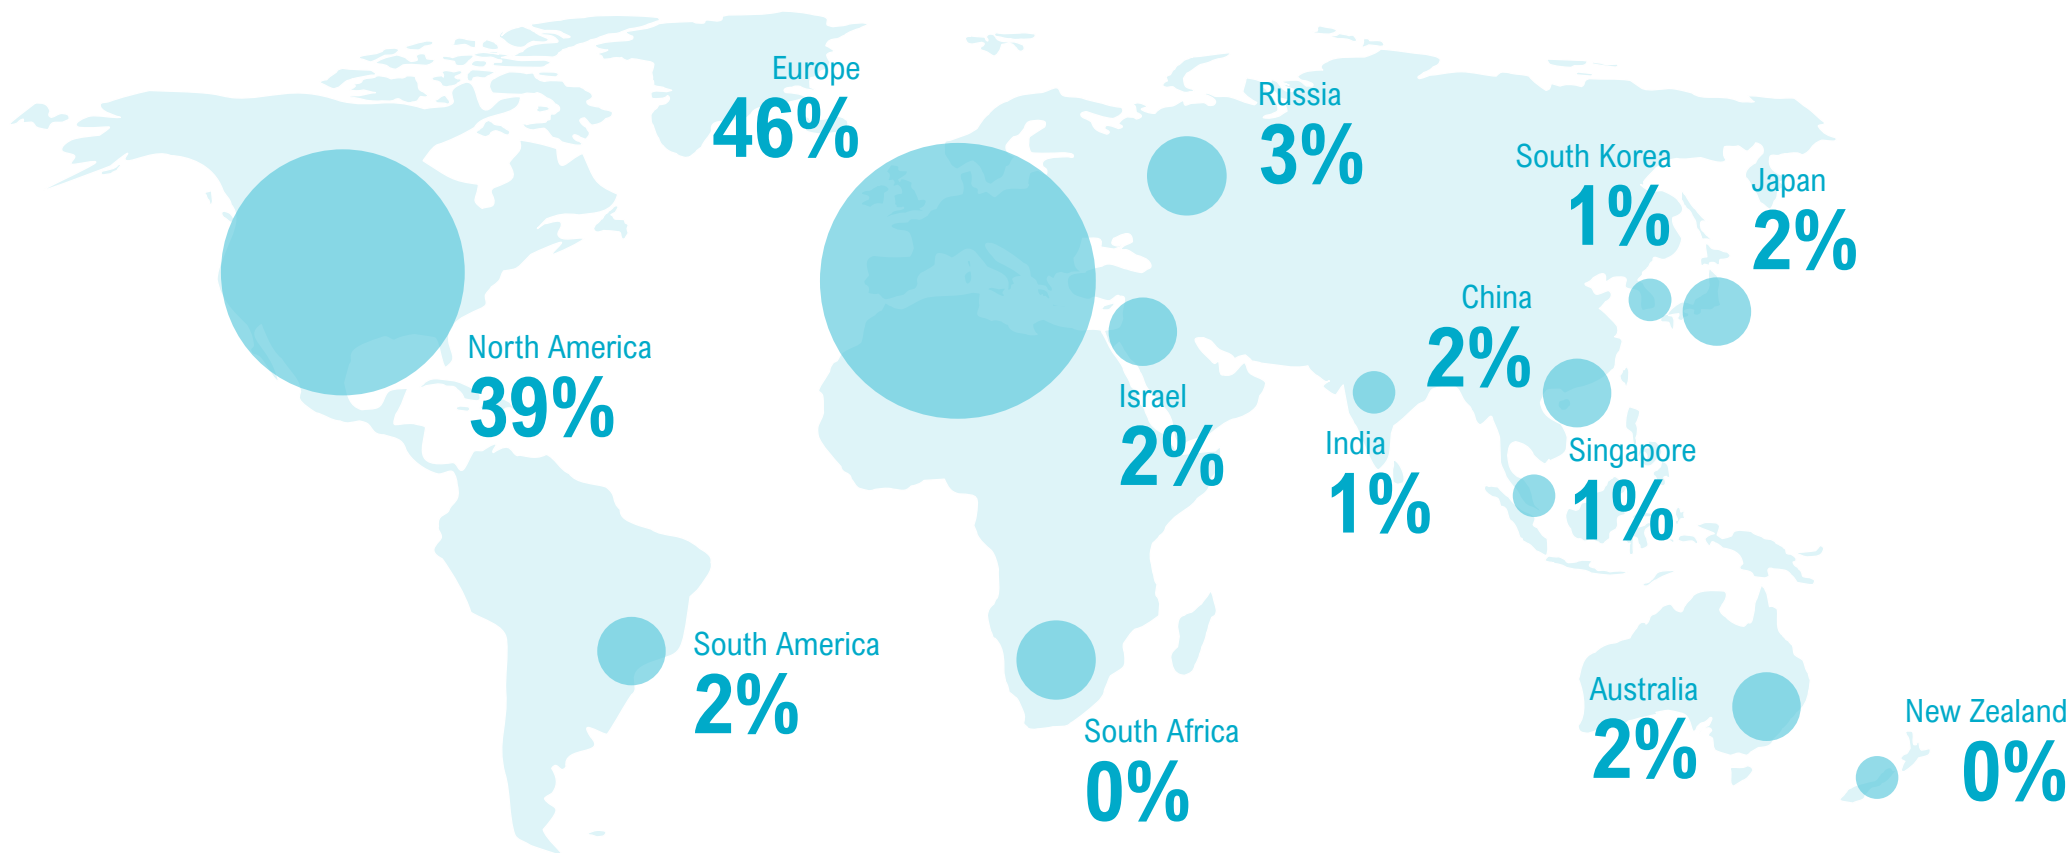

1) Only including developments with first flights from 2010 and major electric concepts; excluding UAVs and purely recreational developments; 2) Percentages may not add up due to rounding

Adoption of Advanced Air Mobility is driven by social-cultural factors, technology, infrastructure, economics and regulation

Overview of the AAM adoption drivers

	1 Social-cultural	2 Technology	3 Infrastructure	4 Economics	5 Regulation & certification
Criteria	Match with values, views, expectations of consumers, citizens and other stakeholders	Technological development of the aircraft , the propulsion and the control of it	Development of infrastructure (physical and digital) and ground transport integration	Development of unit economics compared to alternatives	Maturity of AAM regulation and certification across regions
Current maturity ¹⁾	 LOW	 MEDIUM	 LOW	 LOW	 LOW

1) Based on overall estimation (acknowledging differences between aircrafts and use-cases)


The adoption drivers for AAM each have their underlying sub-drivers

Detailed adoption drivers



Sustainability, social integration, safety and noise/visual pollution are crucial social-cultural factors for AAM adoption

AAM adoption drivers: Social-cultural factors

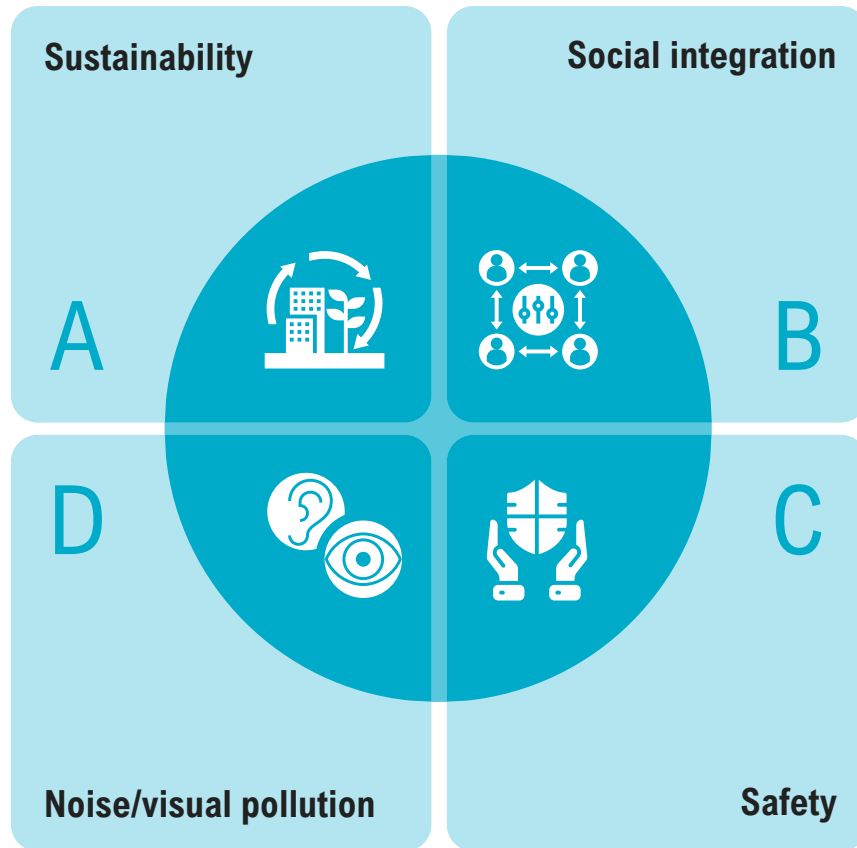

- A Sustainability**
Providing safe, sustainable, low-noise, green (air) mobility solutions could improve connectivity of regions and replace polluting planes (i.e. relating to emissions and energy)
- B Social integration**
Social integration (including public acquaintance as part of other modalities) is necessary to complement long-distance and local transport services
- C Safety**
Safe operations especially in dense urban areas for both passengers and pedestrians are always paramount
- D Noise/visual pollution**
Noise/visual pollution produced by an AAM aircraft especially around vertiports is influenced by an aircraft's design and the way it is operated

Current maturity¹⁾



Expected developments

- Social-cultural factors are mainly driven by **sustainability, social integration, safety, and noise/visual pollution**
- **Non-passenger applications** (e.g. postal, emergency services) expected to **gain public acceptance faster**, picking up by 2025, helping to **pave the way for passenger application**
- **Piloted applications** to gradually gain acceptance with first commercial services emerging starting 2025 - **autonomous passenger applications** are **not expected** to gain widespread acceptance **before 2035** mainly due to safety concerns
- Increasing **airspace saturation** leading to noise/visual pollution **will most likely decrease public acceptance**

1) Based on overall estimation (acknowledging differences between aircrafts and use-cases)

Flight, propulsion and control technology are the three areas that drive AAM adoption from a technology point of view

AAM adoption drivers: Technology

Current maturity¹⁾



Expected developments

- Different aircraft platforms are being developed from **multicopters** with few mechanics involved, **lift & cruise** solutions with double propulsion to more complex **tilting mechanism**
- Among new technologies, the **electric/hybrid propulsion system** is the key component to improve air mobility economics
- While most technology exists for **autonomous flight system**, the absolute robustness of the system is very difficult to obtain – Nevertheless first pilot should come for **non-passenger application** in safe environment over the next decade
- **Additional autonomous system**, specifically for air traffic management, are expected to come in the 2030s to support crowded airspace coming with mass deployment of air mobility solution



Flight technology

- Five key **eVTOL flight architectures** in development: multicopters, quadcopters, lift & cruise (hybrid), tilt-propeller, tilt-wing
- Two other **electric flight architectures**: eCTOL, eSTOL



Propulsion technology

- **Electric systems** as key components in AAM aircraft
- **Full-electric** and **hybrid** configuration mainly driven by market application (e.g. hybrid for highly frequent missions such as emergency medical services)




Control technology

- **Piloted vs. autonomous solutions**
- Autonomous is expected to come first for non-passenger applications in rural areas
- Autonomous for passenger application will likely come in steps

1) Based on overall estimation (acknowledging differences between aircrafts and use-cases)

AAM requires three levels of infrastructure: physical, digital and ground transport integration

AAM adoption drivers: Infrastructure

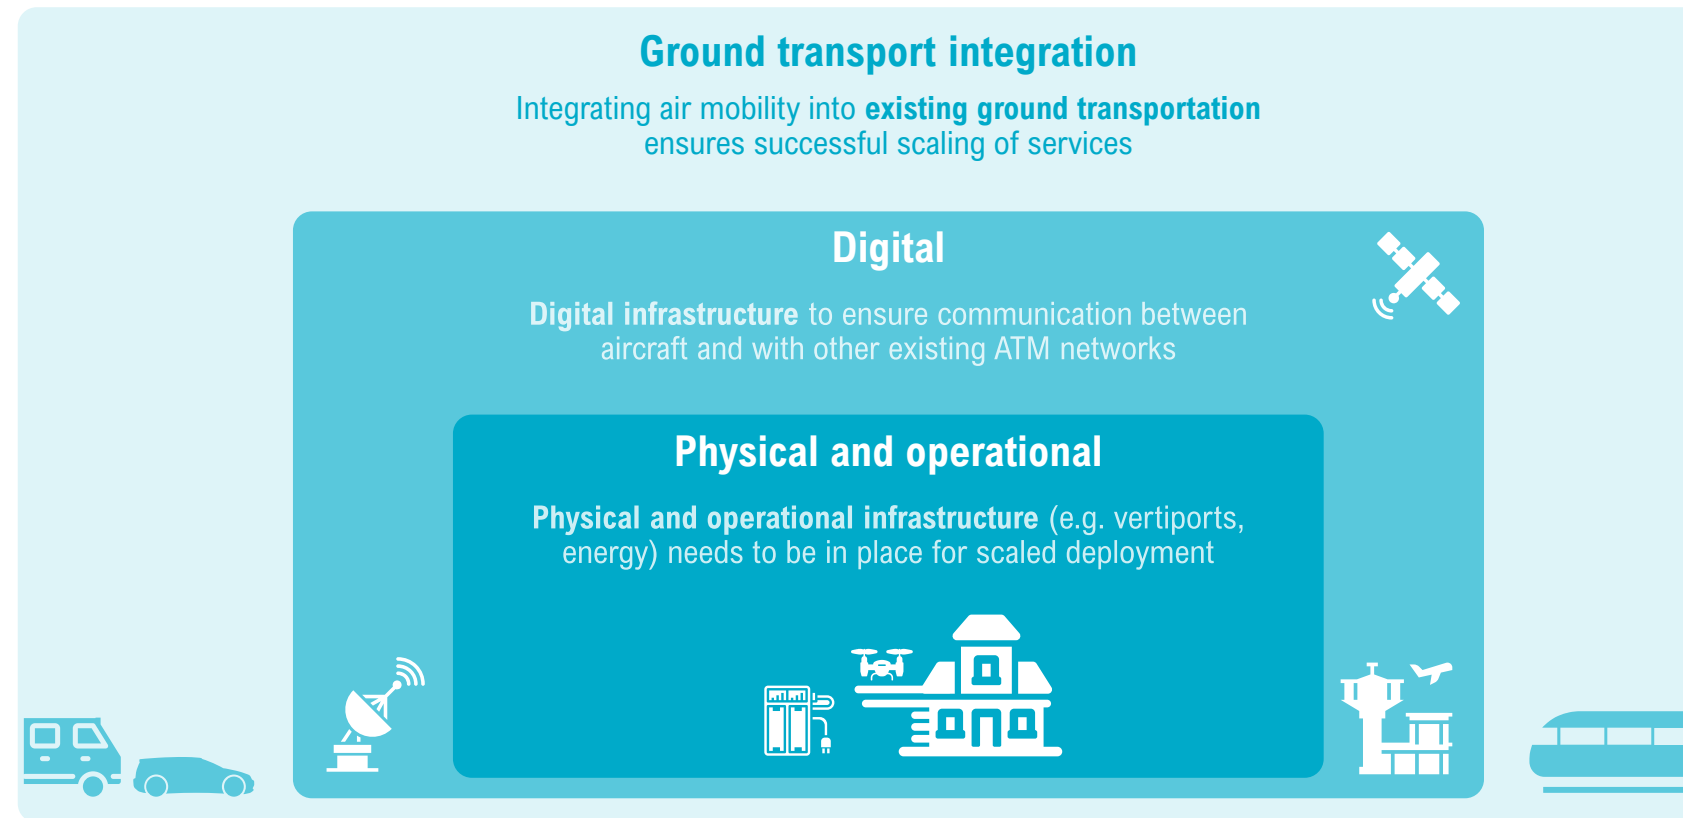

Current maturity¹⁾



Expected developments


- Physical infrastructure picking up **by 2025** with the first commercial **non-passenger** applications
- Infrastructure for **passenger applications** is expected to develop in line with the market, however it is of **higher complexity** in design and operations, and is expected to **pick up** significantly **around 2030**
- Physical infrastructure in **rural areas** is going to develop first due to easier conditions (space, charging, regional airport) and will be paramount even for **urban operations starting around 2025**
- Digital infrastructure for **piloted applications** is already in place today, but must be fine-tuned to better support high-density, low-altitude air mobility
- Digital infrastructure for **autonomous applications** is expected to start developing and collecting more data points at around 2025 with first non-passenger applications

1) Based on overall estimation (acknowledging differences between aircrafts and use-cases)


AAM is not likely to be the cheapest alternative, but is expected to be cost-competitive with traditional air transport

AAM adoption drivers: Economics

PASSENGER

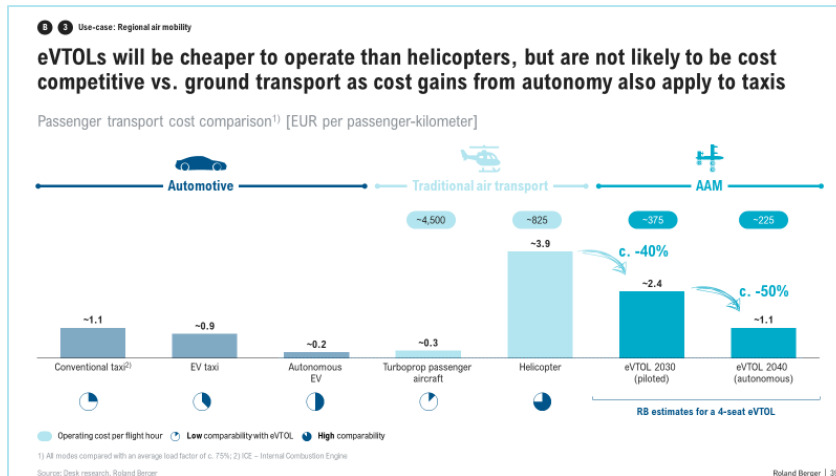

NON-PASSENGER

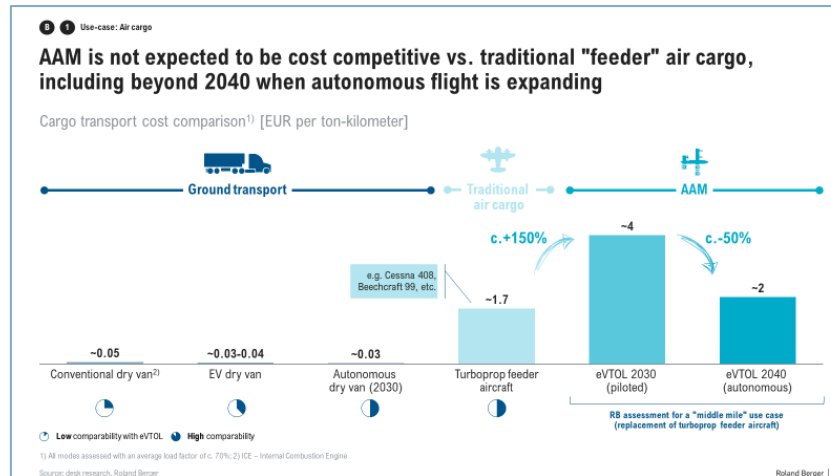

Current maturity¹⁾




Expected developments

- Advanced Air Mobility is **not likely to be cost-competitive** to the cheapest alternative
 - Passenger:** cost of ground transport is expected to decrease as cost gains from autonomy also apply to taxis
 - Advanced Air Mobility is expected to be cost-competitive versus traditional air transport
- Non-passenger:** traditional 'feeder' air cargo is expected to be cheaper as result of higher payload per unit versus Advanced Air Mobility
- Advanced Air Mobility needs to be **affordable for the general public** as opposed to being a niche product for the affluent society in order to gain broad traction

1) Based on overall estimation (acknowledging differences between aircrafts and use-cases)


Backup: eVTOLs will be cheaper to operate than helicopters, but are not likely to be cost competitive vs. ground transport as cost gains from autonomy also apply to taxis

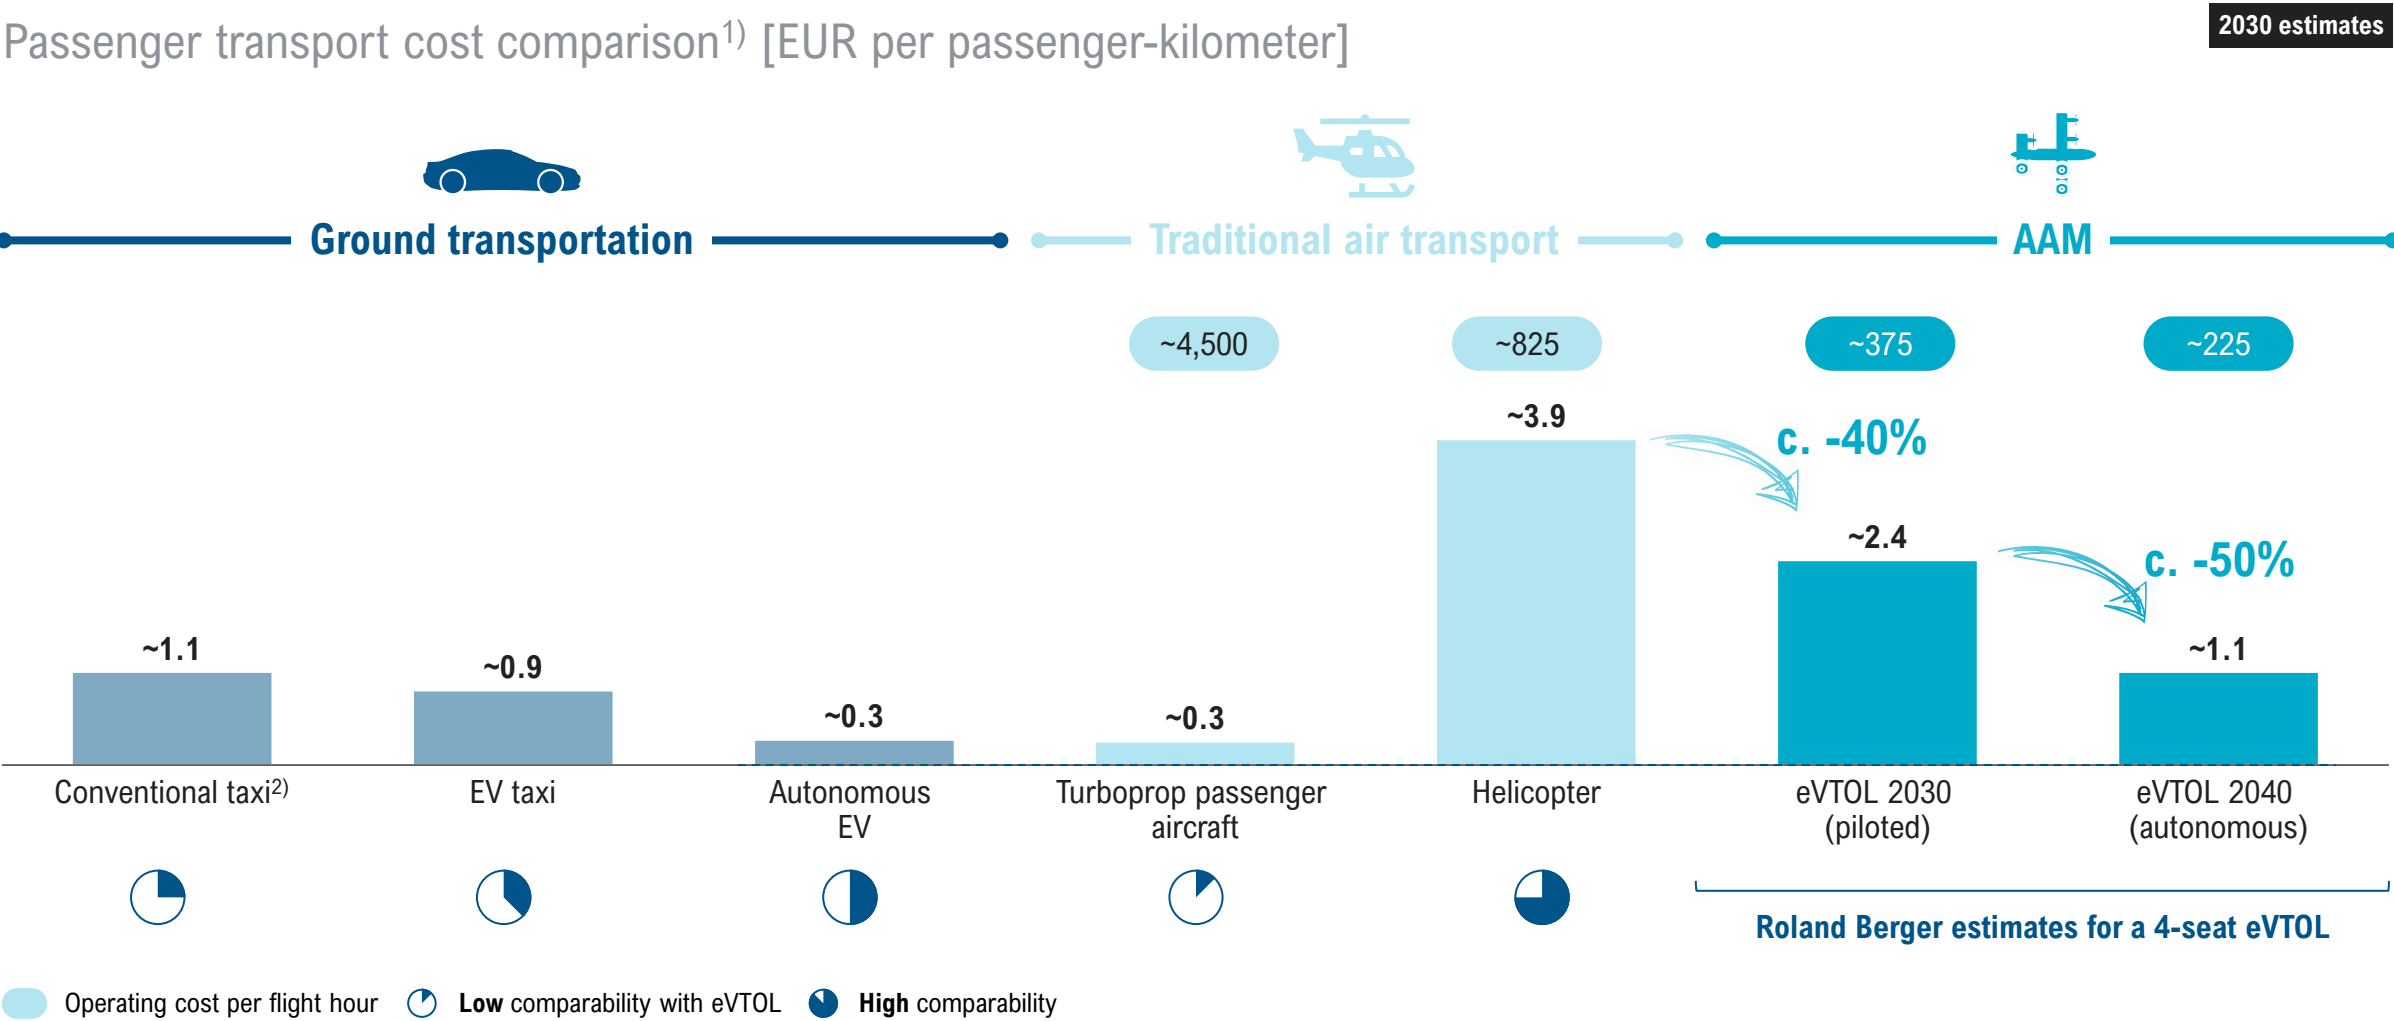

1) All modes compared with an average load factor of c. 75% based on 2021 prices not adjusted for inflation; 2) ICE – Internal Combustion Engine

Backup: eVTOLs are more energy efficient than traditional airplanes but are not likely to be energy competitive vs. ground transport due to high energy usage

Passenger transport cost comparison [Wh per passenger-kilometer]

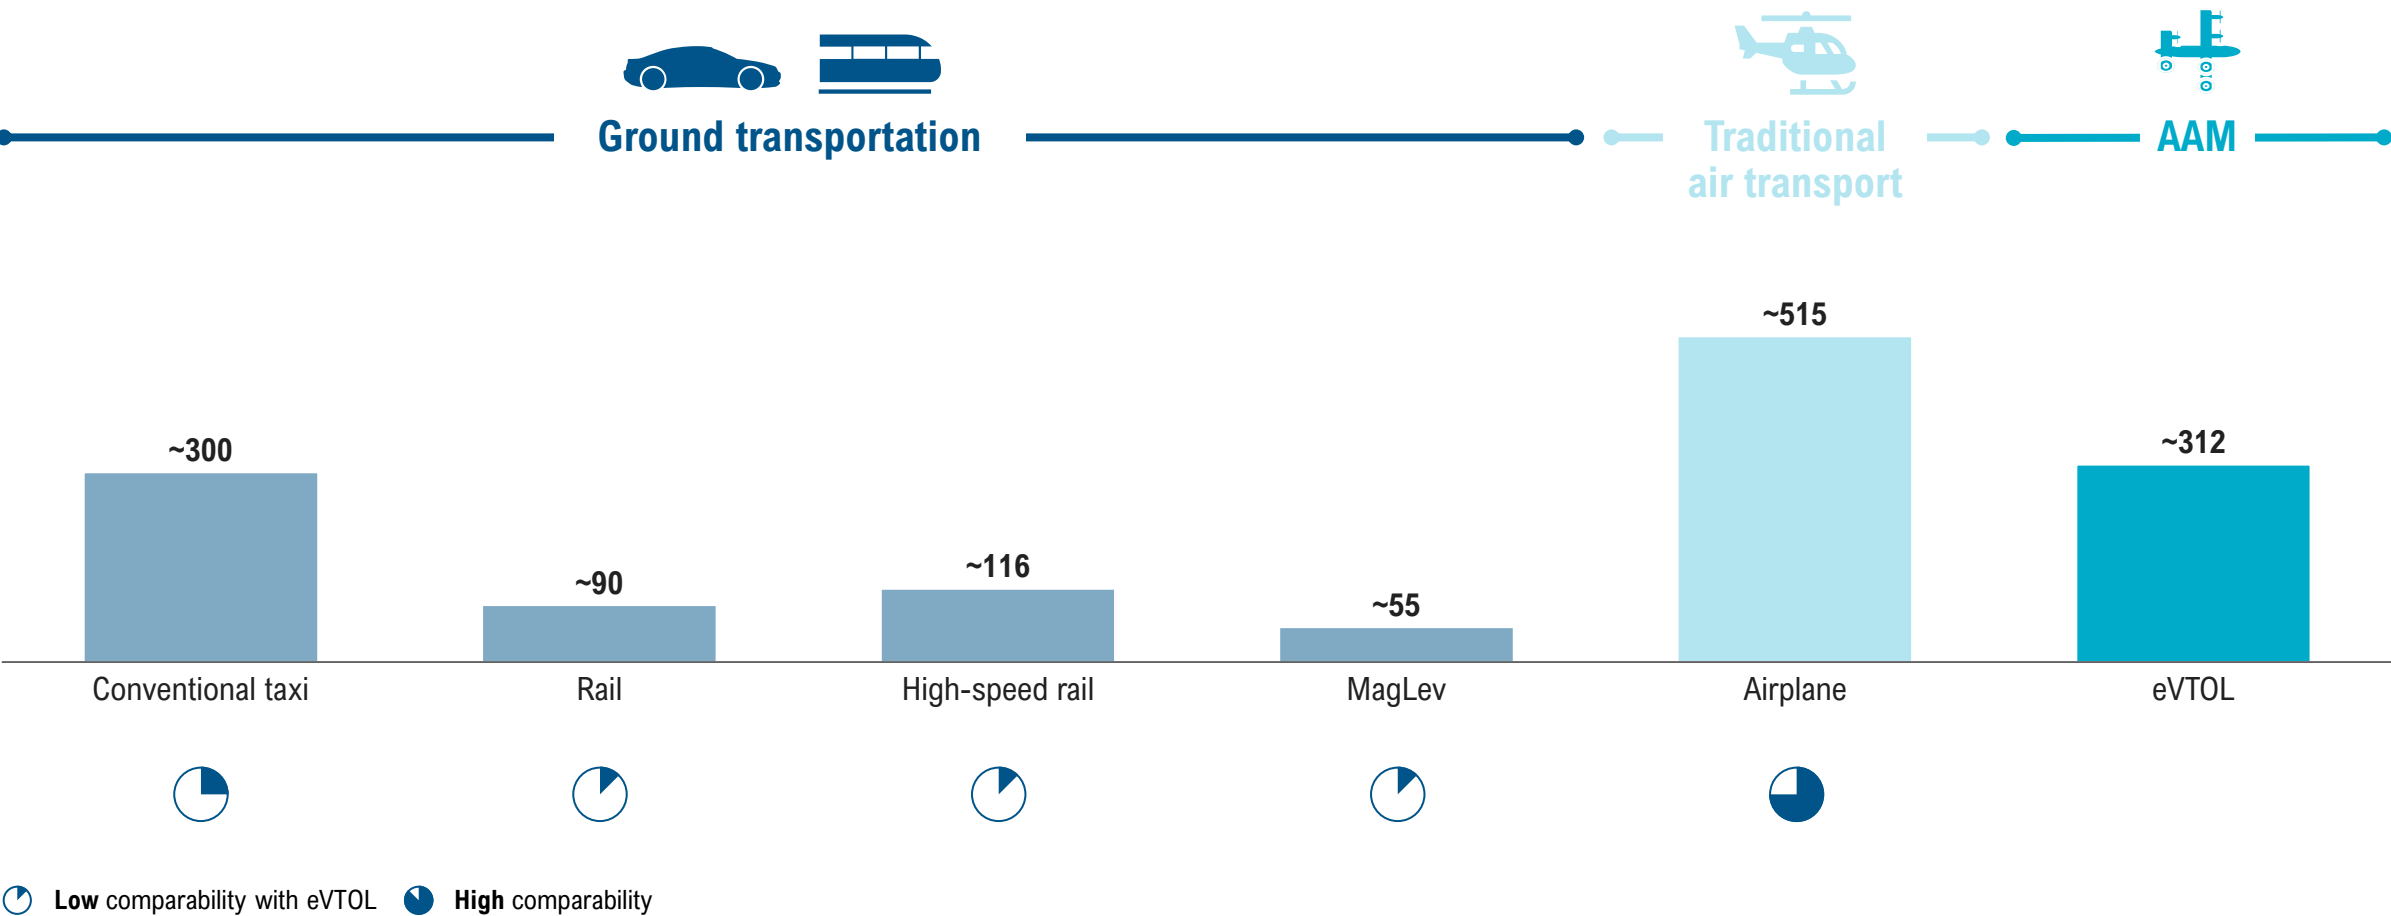

Required regulatory approvals relate to the aircraft, MRO, operations and various others

AAM adoption drivers: Regulation & certification

 Aircraft		 MRO	 Operations	 Other regulations [non-exhaustive]			
Design Organization Approval (DOA)	Production Organization Approval (POA)	Maintenance Organizational Approval (MOA)	Air Operator Certificate (AOC)	Commercial Pilot License (CPL)	Air traffic management	Local regulations	Spectrum allocation
- DOA complies with the requirements of EASA's Part 21, which contains rules for a company designing and/or producing aircrafts, aircraft parts, and appliances - DOA details elements required for design organization and activities of products such as large aircrafts, engines, small rotorcraft, and sailplanes to ultimately decide whether a company can bring a safe aircraft to market	- POA related procedures are integrated into the EASA Quality Management System, which also complies with the requirements of EASA's Part 21 - Under the POA, companies manufacturing products and parts must prove that the production and quality management processes are in accordance with regulatory standards	MOA is a standard for the approval of organizations that perform maintenance on aircraft and aircraft components that are registered in EASA Member States	- AOCs are granted by the relevant authority in each jurisdiction, typically the National Aviation Authority - Main objective of AOC is to ensure operations are safe and compliant with regulation. Regulator examines extensively the operator's workforce skills, procedures and operating manuals	- Aviation authority requires certified pilot to operate manned aircraft - Pilot must follow a standard training and demonstrate required capabilities in order to obtain a valid CPL	Air traffic controller must comply to the EASA regulation	Cities and local governments control, at least in part, the development of the ground infrastructure and operations parameters (e.g. noise level, no fly zone, emission) therefore the development of new routes	International and national bodies are responsible for spectrum allocation, notably to support autonomous system
Authority must issue a Type Certificate for each aircraft design before to start any commercial operation							

1) Based on overall estimation (acknowledging differences between aircrafts and use-cases)

Current maturity¹⁾




Expected developments

- Regulation and certification work in charge of **Aviation mobility** authorities and **Aerospace manufacturing** (e.g. EASA in Europe)
- China, US and Europe are **defining the market** and consequently regulation and certification
- Regulatory environment is primarily defined at **national level**
- Risk management** is at the heart of all regulators favoring **non-passenger piloted applications in rural environment**, especially as proof of concept
- Autonomous operation will be proof tested on cargo application first, **autonomous pilot** for passenger applications will follow
- eVTOLs face **certification risks** due to the novelty this market represents in the Air Mobility in terms of both **design, technology and use cases**

After 2030-40 more widespread adoption of AAM mobility will take place – Non-passenger transport is expected to have earlier adoption as result of lower barriers

AAM adoption curves

Expected market maturity of passenger and non-passenger applications

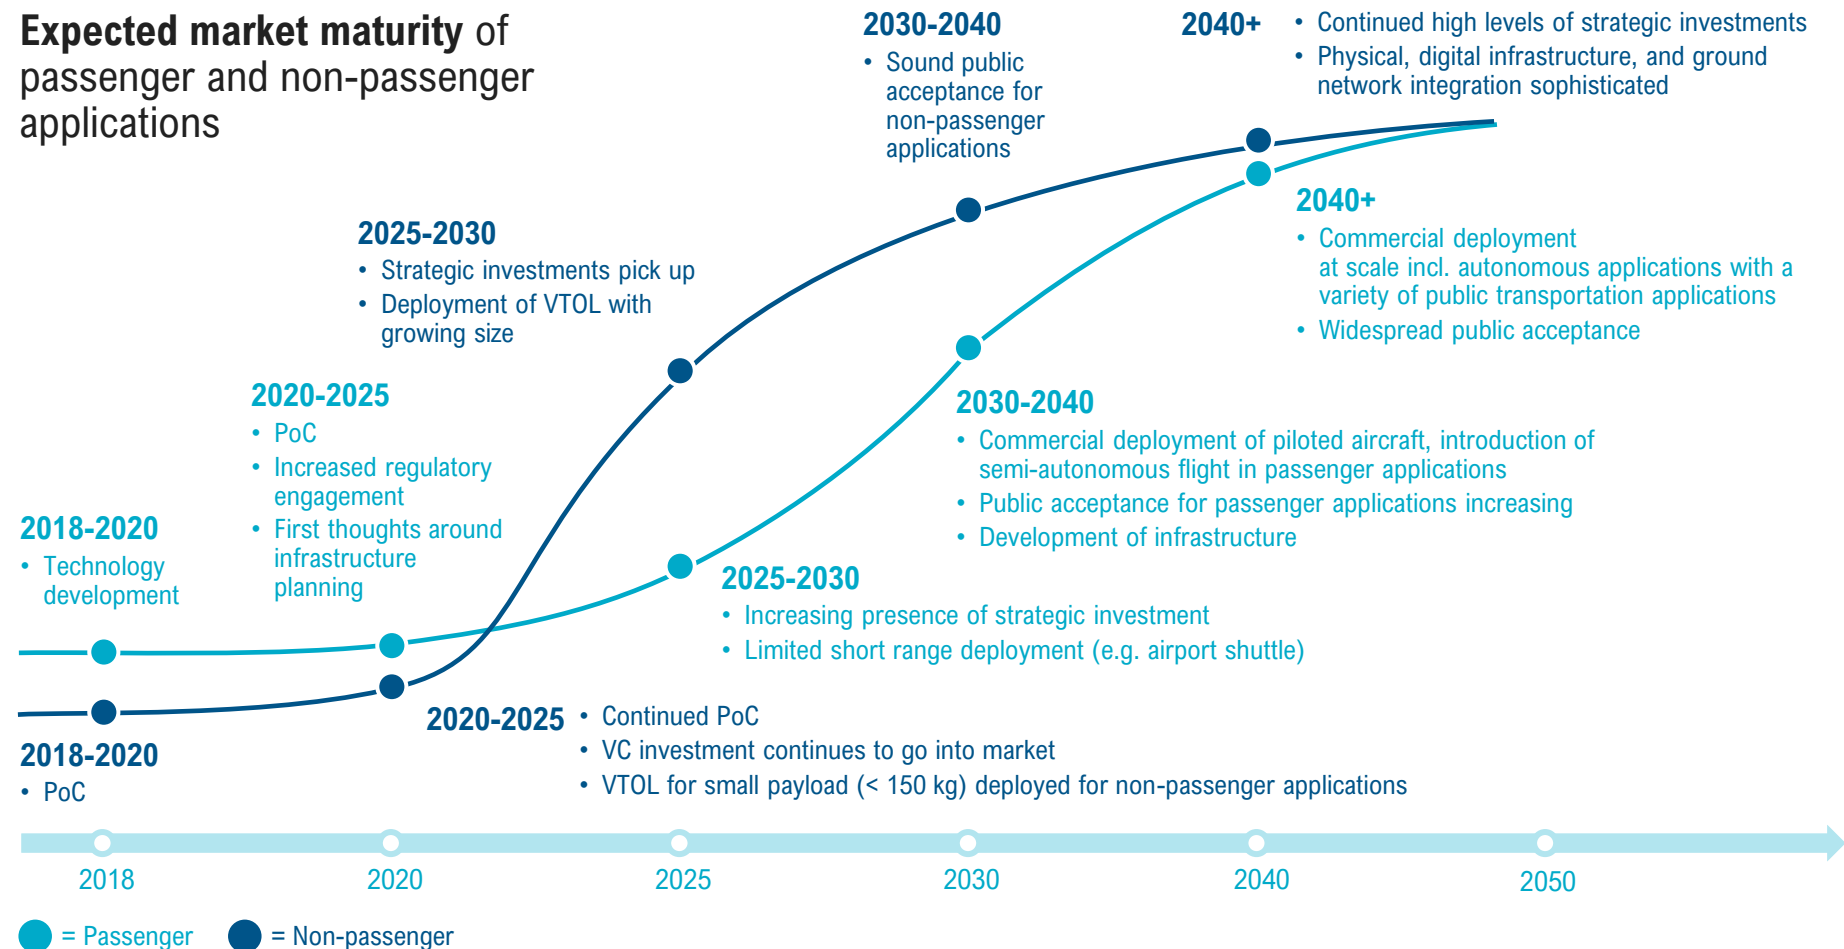

- **Selected pilots** for cargo and passenger transport in selected cities already in place
- First **commercial applications** may emerge around 2025 with focus **on cargo** in **rural areas** and first adopter cities (starting with small drone – payload < 150 kg)
- **Passenger transport** may start to kick in with piloted aircrafts around 2030 – After 2035 and 2040 widespread adoption of air mobility will take place



C. Implications for The Netherlands and Western Europe



Ministerie van Infrastructuur
en Waterstaat

A wide variety of passenger and non-passenger applications exist for AAM in The Netherlands and Western Europe

Potential AAM use-cases (non-exhaustive)

PASSENGER USE CASES

Scheduled

- Regional air mobility
- Air traffic electrification
- Airport shuttle
- Airline feeder flights

On-demand

- Emergency medical services (air ambulance)
- Tourism shuttle
- Intra-city air taxi
- Commuter air taxi

Other

- Regional airline routes¹⁾
- Offshore services (e.g. windmill parks)

NON-PASSENGER USE CASES

Cargo transportation

- Transportation of air cargo
- Intralogistics
- Emergency medical services (medical supply, live organs, lab samples)
- Remote supply (e.g. scarcely populated areas)
- Offshore services (cargo)

Other

- Site/area surveying
- University research
- Law enforcement
- Construction support
- Firefighting
- Military applications

1) Once sufficient ranges can be achieved

Two selected use-cases have been detailed: regional air mobility up to 250 km (eVTOL) and Air Traffic Electrification up to 1,000 km (eSTOL and eCTOL)

Selected use-cases

1 Regional air mobility (up to 250 km range): eVTOL

Implications for The Netherlands and Western Europe: Regional Air Mobility (use-case)

RAM consists of scheduled passenger transport and can increase accessibility by offering sustainable transport options

Use-case snapshot: Regional Air Mobility (eVTOL)

REGIONAL AIR MOBILITY

Geography	The Netherlands and Western Europe
Definition	- Regional passenger transport - City to city trips - Urban to rural trips - Scheduled flights
FLIGHT SPECIFICS	
Trip time (max)	Up to 120 minutes
Range (typical)	50-250 km
Payload (max)	350 kg
Speed (max)	Up to 300 km/h
Type of aircraft (most likely)	- eVTOL: tilt-wing - eVTOL: tilt-propeller

1) Economics vs. alternative

Source: CBS QOIL 2019, Expert interviews, Uber Air, Distance.io, desk research, Roland Berger

Key REQUIREMENTS

VALUE PROPOSITION

- Accessibility:** eVTOLs allow more destinations and increase speed, especially in non-densely populated and less-connected areas
- Sustainability:** electricity enables renewable energy
- Comfort:** smaller passenger groups reduce check-in time and noise
- Frequency:** smaller aircrafts allow for more flights per hour

MATURITY OF ADOPTION FACTORS

Regulation & certification	Low	High
Technology		
Infrastructure		
Economics¹⁾		
Social-cultural factors		

Currently (2021) Expected (2050)

2 Air traffic electrification (250-1,000 km range): eSTOL and eCTOL

Implications for The Netherlands and Western Europe: Air Traffic Electrification (use-case)

Air traffic can be partly electrified by eSTOL and eCTOL to create sustainable alternatives for conventional air traffic while increasing accessibility

Use-case snapshot: Air Traffic Electrification

AIR TRAFFIC ELECTRIFICATION

Geography	Western Europe
Definition	- International passenger transport from the Netherlands to North-Western Europe - Scheduled flights
FLIGHT SPECIFICS	
Trip time (max)	Up to 180 minutes
Range (typical)	250-1,000 km
Payload (max)	2,000 kg
Speed (max)	Up to 500 km/h
Type of aircraft	- eSTOL (short distance, less passengers, landing near centers) - eCTOL: longer distances, more passengers)

Source: Expert interviews, Desk research, Roland Berger

Key REQUIREMENTS

VALUE PROPOSITION

- Sustainability:** electricity enables renewable energy
- Accessibility:** smaller aircrafts and shorter runways allow more destinations (closer to destination)
- Price:** technology might be cost competitive with conventional air transport
- Comfort:** smaller passenger groups reduce check-in time and noise
- Frequency:** smaller aircrafts allow for more flights per hour

MATURITY OF ADOPTION FACTORS

Regulation & certification	Low	High
Technology		
Infrastructure		
Economics¹⁾		
Social-cultural factors		

Currently (2021) Expected (2040)

Including use case specification: tourism shuttle for the Efteling

RAM consists of scheduled passenger transport and can increase accessibility by offering sustainable transport options

Use-case snapshot: Regional Air Mobility (eVTOL)

REGIONAL AIR MOBILITY

Geography	The Netherlands and Western Europe
Definition	- Regional passenger transport - City to city trips - Urban to rural trips - Scheduled flights
FLIGHT SPECIFICS	
Trip time (max)	Up to 120 minutes
Range (typical)	50-250 km
Payload (max)	350 kg
Speed (max)	Up to 300 km/h
Type of aircraft (most likely)	- eVTOL: tilt-wing - eVTOL: tilt-propeller

1) Economics vs. alternative


Key REQUIREMENTS

VALUE PROPOSITION

- Accessibility:** eVTOLs allow more destinations and increase speed, especially in non-densely populated and less-connected areas
- Sustainability:** electricity enables renewable energy
- Comfort:** smaller passenger groups reduce check-in time and noise
- Frequency:** smaller aircrafts allow for more flights per hour





MATURITY OF ADOPTION FACTORS

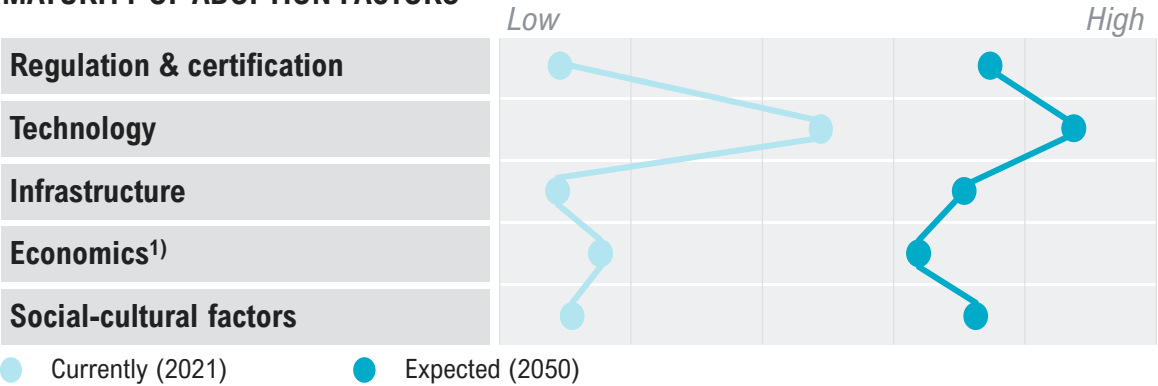

It is estimated that 20-40 k passengers per day will use eVTOL transport in 2050 for which 700-1,400 aircrafts are required, predominantly tilt wing

Market sizing results RAM

Estimation – Assumptions apply¹⁾

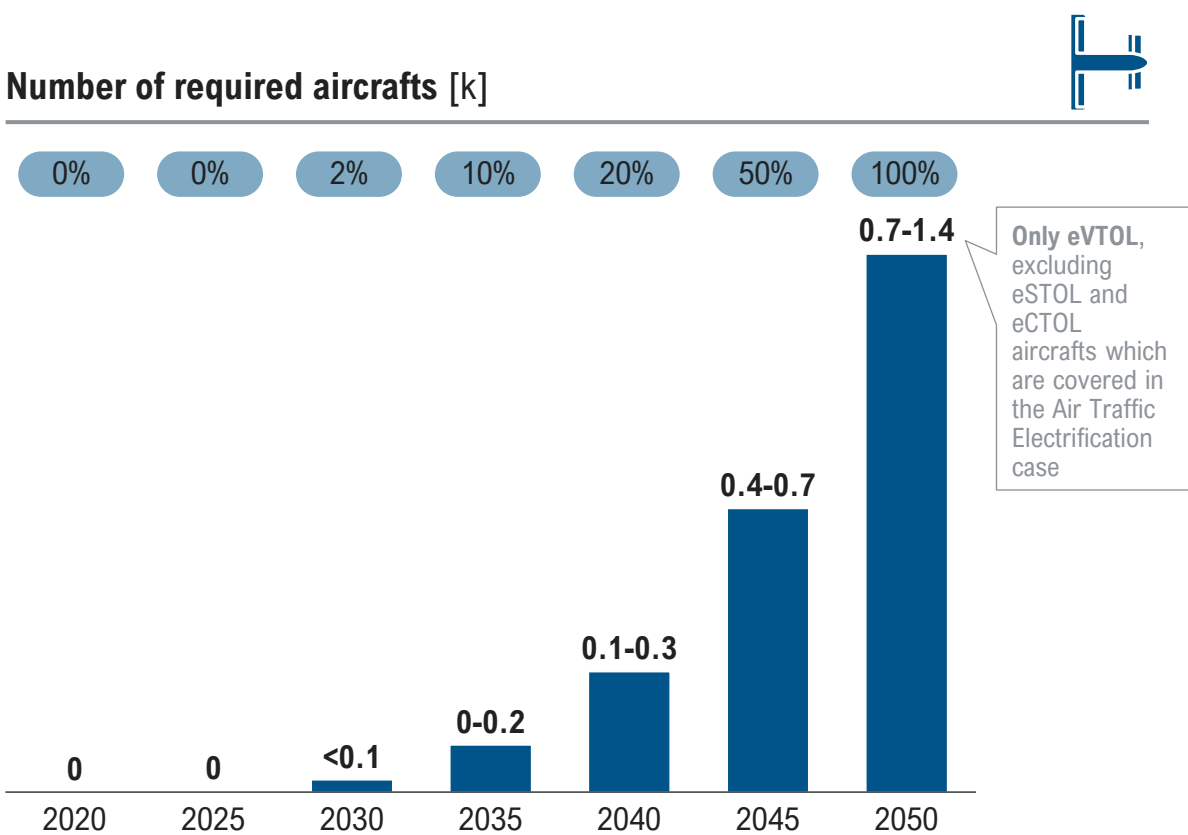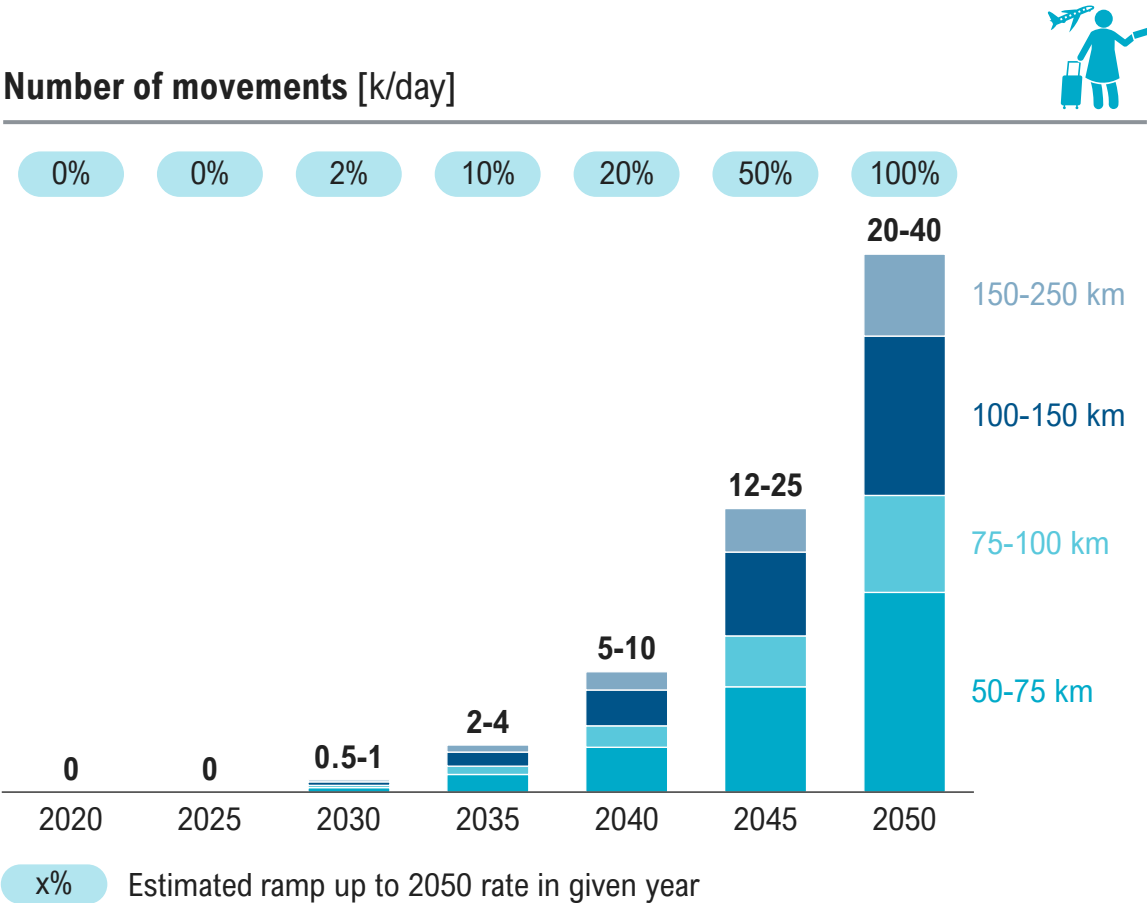

1) Assumptions include that the adoption drivers (social-cultural, technology, infrastructure, economics and regulation) are fully met, and a 3% switch rate if time is 100% reduced

The addressable area for eVTOL is between 50-250 km – For Utrecht, cities such as The Hague, Deventer, Middelburg and Cologne would be in range


Addressable area and associated movements: Regional Air Mobility

Addressable area of a station in Utrecht



■ Addressable eVTOL ■ Addressable eSTOL/eCTOL

Movements in, from and to the Netherlands [m/day]

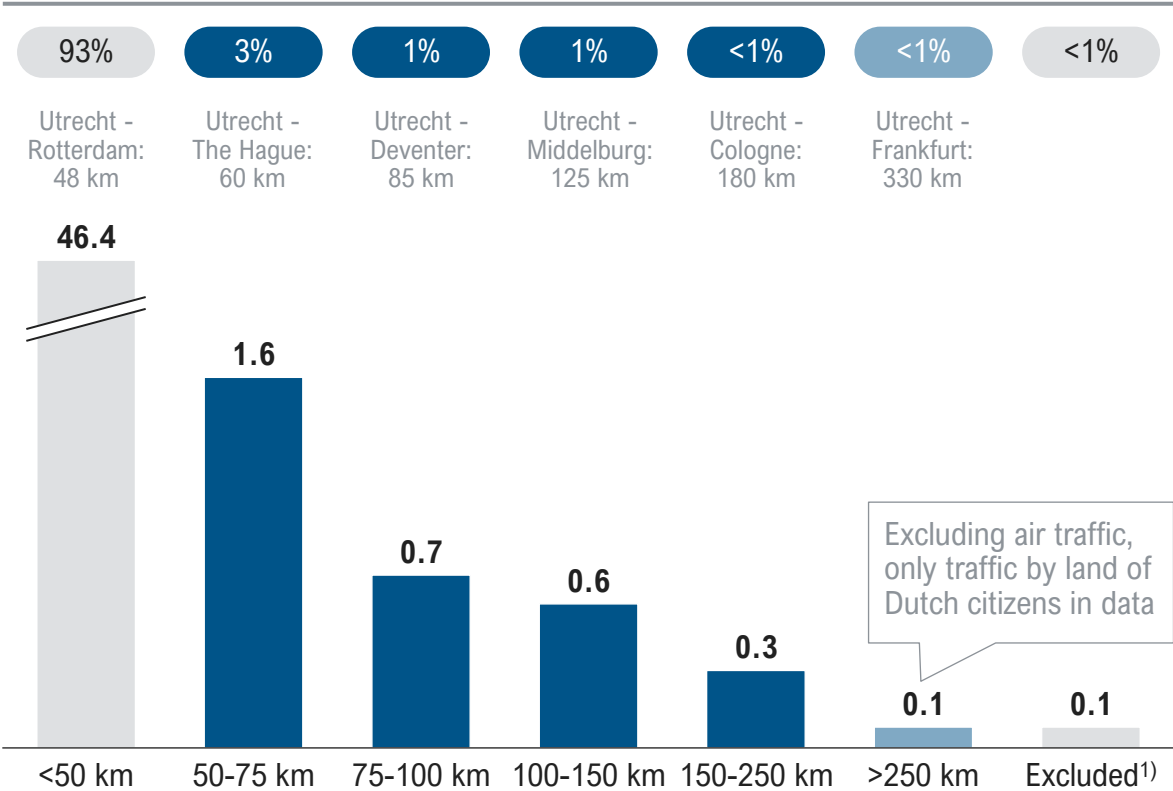

■ Addressable eVTOL ■ Addressable eSTOL/eCTOL ■ Not addressable

1) Tours (departure address same as arrival address, e.g., hiking) and movements with intermediate stops (e.g., package delivery) excluded

20-40 k passengers per day are expected to use eVTOLs by 2050 – The switch rate is expected to be higher for longer distances as result of higher time savings

Market sizing movements (demand): Regional Air Mobility

Assuming adoption drivers are fully met !

Range	Movements [m/day]		Example travel	Aircraft type (most likely)	Typical time saving	Estimated switch rate
<50 km		46.4 93%	Utrecht - Rotterdam: 48 km	n.a.	~20%	0%
50-75 km	1.6	3.2%	Utrecht – The Hague: 60 km	eVTOL ³⁾	~25%	0.5-1%
75-100 km	0.7	1.5%	Utrecht – Deventer: 85 km	eVTOL ³⁾	~25%	0.5-1%
100-150 km	0.6	1.2%	Utrecht – Middelburg: 125 km	eVTOL ³⁾	~50%	1-2%
150-250 km	0.3	0.7%	Utrecht – Cologne: 180 km	eVTOL ³⁾	~50%	1-2%
>250 km	0.1	0.2%	Utrecht – Frankfurt: 330 km	eSTOL	~70%	1.5-2.5%
Excluded	0.1	0.3%		N.a.	N.a.	N.a.

Substitution of land traffic only

Source


Movements in ODin 2019 (CBS), extrapolated to entire Netherlands

Expected most (time) efficient aircraft

Assumptions apply¹⁾

! Assuming 3% switch rate if time is 100% reduced







Estimation – Assumptions apply

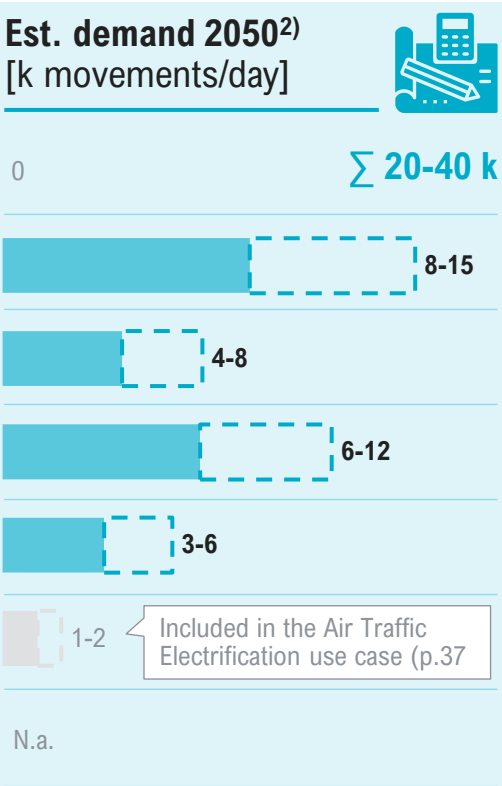

1) Assuming pre/post travel 15 min each, lift-off/landing 2 min each, speed 280 (tilt wing) km/h or 450 km/h (eCTOL), compared to car; 2) 2040 for eSTOL; 3) Tilt-wing assumed for eVTOL calculations

700 to 1,400 eVTOLs are expected for RAM in 2050 based on the estimated 20-40 k eVTOL movements in 2050

Market sizing required aircrafts (supply): Regional Air Mobility Estimation – Assumptions apply

Range	Est. demand 2050 ¹⁾ [k movements/day]	Est. peak demand 2050 [k movements/h]	Aircraft type (most likely)	Capacity [passenger]	Occupancy at peak	Turn around time [min]	Required aircrafts in 2050 ¹⁾ [k]
<50 km	0 Σ 20-40 k	0	n.a.	n.a.	n.a.	n.a.	0 Σ 0.7-1.4 k
50-75 km	 8-15	 0.6-1.2	eVTOL ²⁾	5	67%	30	 0.2-0.5
75-100 km	 4-8	 0.3-0.6	eVTOL ²⁾	5	67%	30	 0.1-0.3
100-150 km	 6-12	 0.5-1	eVTOL ²⁾	5	67%	30	 0.2-0.5
150-250 km	 3-6	 0.2-0.5	eVTOL ²⁾	5	67%	30	 0.1-0.3
>250 km	 1-2	 0.1-0.2	eSTOL	8	80%	45	 <0.1 Included in the Air Traffic Electrification use case (p.38)
Excluded	N.a.		N.a.	N.a.	N.a.	N.a.	
Source	~50% of passengers travel within the 4 peak hours (based on movements in ODin 2019 of CBS) Expected most (time) efficient aircraft AAMs typically 4-6, eSTOL/ eCTOL ~8 Some inefficiency in occupancy Time for charging (expert interview based)						

1) 2040 for eSTOL; 2) Tilt-wing assumed for eVTOL calculations


As an example, effects and considerations of eVTOL as a tourism shuttle to the Efteling have been assessed – Other use cases (e.g. Wadden) to be assessed

RAM use case specification: tourism shuttle for the Efteling

Rough estimation – Assumptions apply

RAM specification: Efteling

- Efteling has **strong growth ambitions**: 7 m visitors/y
 - Pre-COVID (2019) 5 m visitors/y
- Peak periods** with 37 k/day visitors put pressure on nearby villages and highways
- eVTOL might be a solution to future congestion problems**

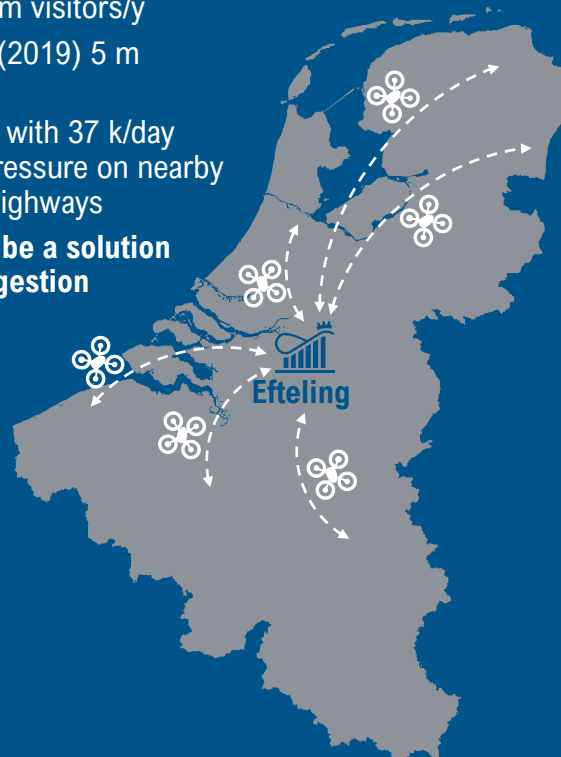

Expected VOLUMES on peak days

City	Visitor movements/day total	Commuter switch rate	Visitor movements/day eVTOL	Required eVTOLs
Amsterdam	3,000	~1%	30	3
The Hague	2,500	~1%	25	2.4
Groningen	500	~1.5%	8	1.1
Almere	750	~1%	8	0.8
Brussels	1,600	~1.5%	23	2.4
Antwerp	650	~1%	6	0.6
Gent	250	~1.3%	3	0.3
Total			86 + 17	9 + 1.4

Assumptions

- 50 k visitors on peak days assumed (in line with growth ambition)
- Movements/day by city based on known NL/BE visitor split and city sizes (with a correction for distance)
- Only largest cities in NL/BE for which eVTOL saves significant time given, grey rows excluded in final calculation due to low eVTOLs
- Commuter switch rate, eVTOL movements and required eVTOLs calculated like RAM eVTOL sizing

Key EFFECTS and CONSIDERATIONS



86 movements/day by eVTOL will lead to a reduction of 17 cars / 34 car movements (assuming c.2.5 passengers per car)



Since alternative modes of transport (public transport, car) also probably depend on renewable energy sources by 2050



Estimates of AAM energy consumption vary¹⁾, but the range **0.5-1.5 kWh/km seems plausible for a ~100 km distance**, a flight between Efteling and Amsterdam (~80 km) then requires 40-120 kWh, whereas the trip by electric car requires 17 kWh²⁾



Flexible allocation: eVTOLs can be used for intercity/work transport on weekdays, and for tourism in the weekend



In the calculation a commuter switch rate of ~1-1.5% was used, **switch rate could become larger** if Efteling would focus on eVTOL promotion and offer combined transport and entrance tickets

1) Depending on source, aircraft type and distance, significant energy consumption during lift-off and landing results in more efficiency on longer distances; 2) Assuming 106 km (distance Google Maps) and 16 kWh per 100 km (Tesla Model 3)

Air traffic can be partly electrified by eSTOL and eCTOL to create sustainable alternatives for conventional air traffic while increasing accessibility

Use-case snapshot: Air Traffic Electrification


AIR TRAFFIC ELECTRIFICATION

Geography	Western Europe
Definition	• International passenger transport from the Netherlands to North-Western Europe • Scheduled flights
FLIGHT SPECIFICS	
Trip time (max)	Up to 180 minutes
Range (typical)	250-1,000 km
Payload (max)	2,000 kg
Speed (max)	Up to 500 km/h
Type of aircraft	• eSTOL (short distance, less passengers, landing near centers) • eCTOL: longer distances, more passengers)

Key REQUIREMENTS


VALUE PROPOSITION

- **Sustainability:** electricity enables renewable energy
- **Accessibility:** smaller aircrafts and shorter runways allow more destinations (closer to destination)
- **Price:** technology might be cost competitive with conventional air transport
- **Comfort:** smaller passenger groups reduce check-in time and noise
- **Frequency:** smaller aircrafts allow for more flights per hour

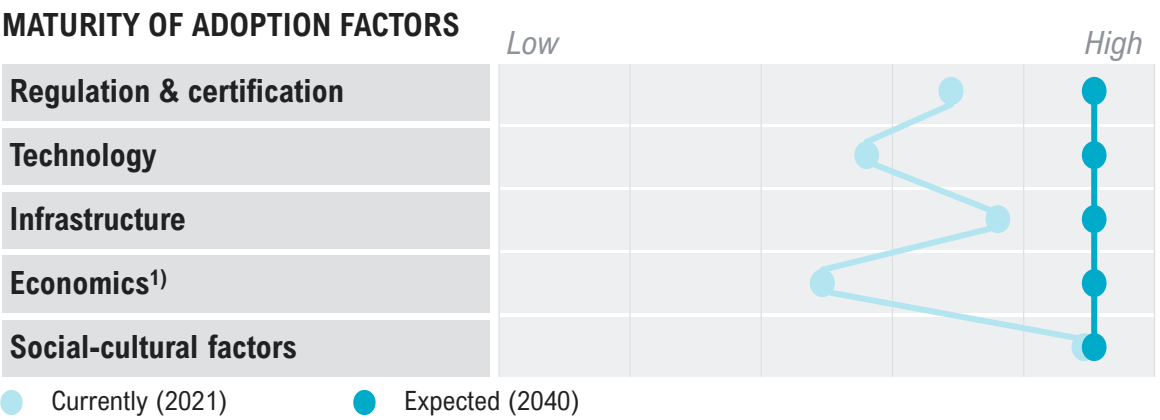

It is estimated that 4-14 k passengers per day will use eSTOL and eCTOL transport in 2040 for which 110-310 aircrafts are required


Market sizing results eSTOL and eCTOL

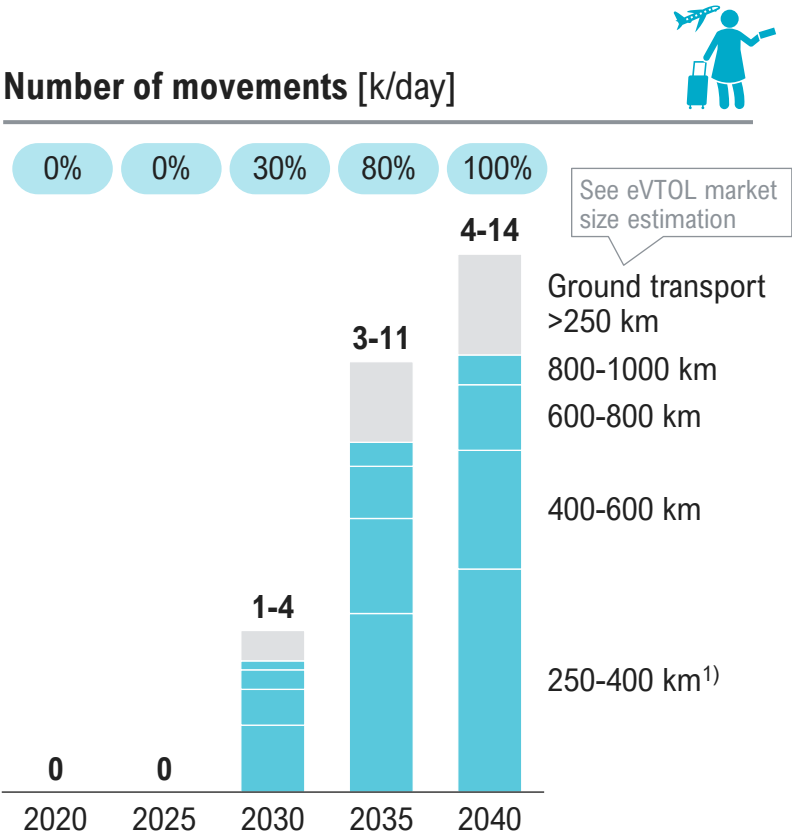

x% Estimated ramp up to 2050 rate in given year


1) Ranges <250 km ignored since air traffic movements in this range are limited

Source: CBS, Expert interviews, CROW, Groene11, Desk research, Roland Berger

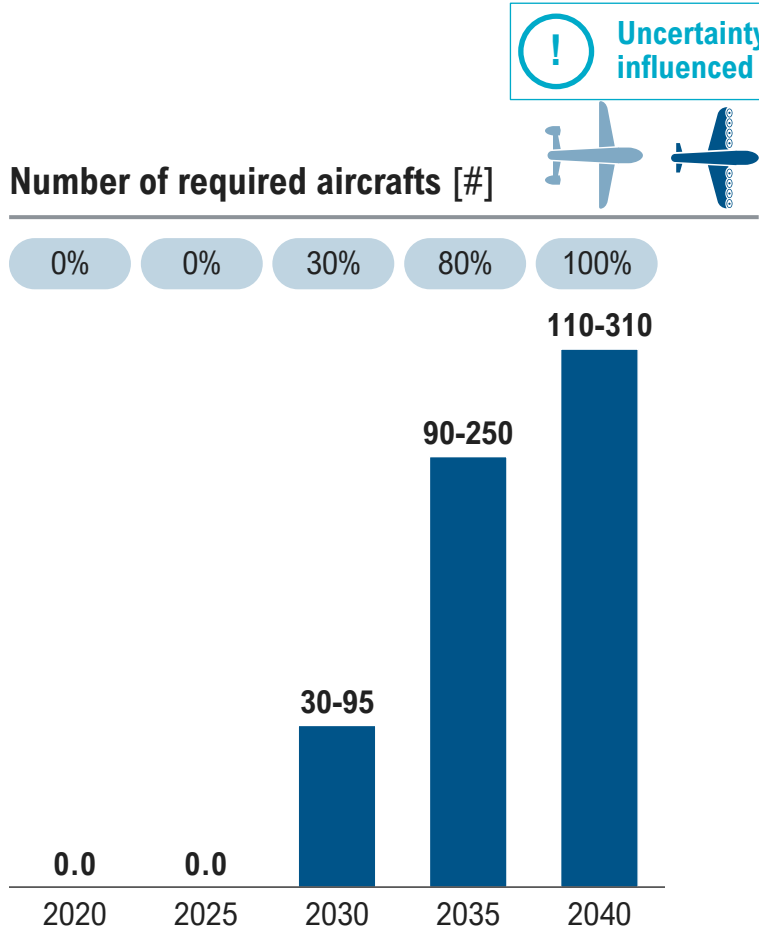

! Uncertainty: adoption strongly influenced by regulation

Estimation – Assumptions apply

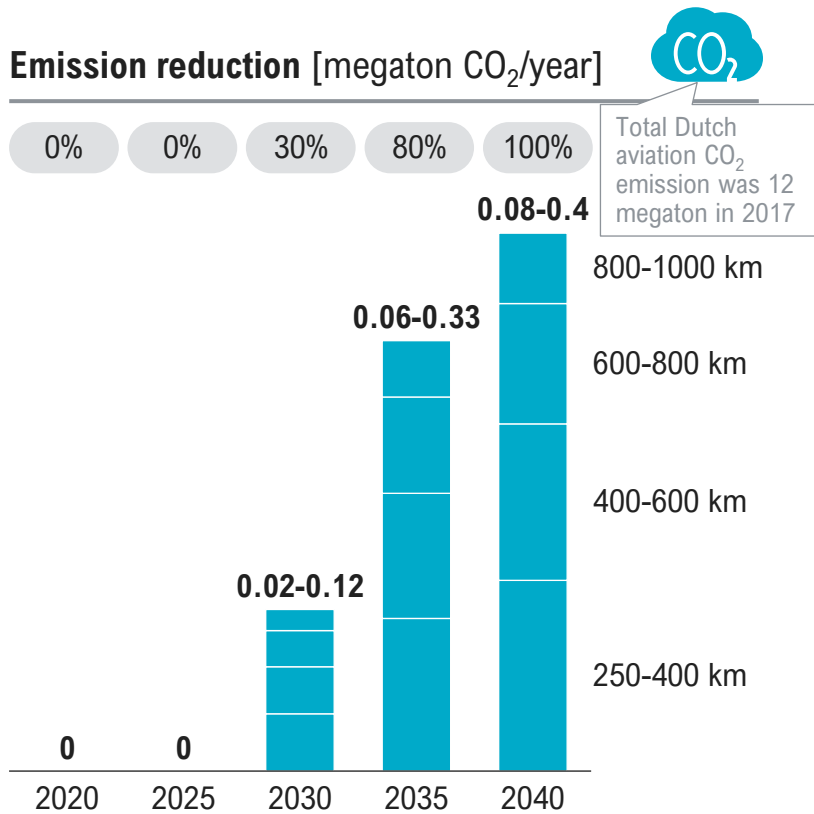


Assuming 200 gr CO₂/passenger kilometer for conventional airplanes (rough estimation CROW), no emissions for eSTOL/eCTOL and no emissions for ground transport (since cars will also be electric)

The addressable area for eSTOL and eCTOL is up to 1,000 km – Cities such as London, Manchester, Prague and Oslo would be in range


Addressable area and associated movements: Air Traffic Electrification

Estimation – Assumptions apply

Addressable area of a station in Utrecht

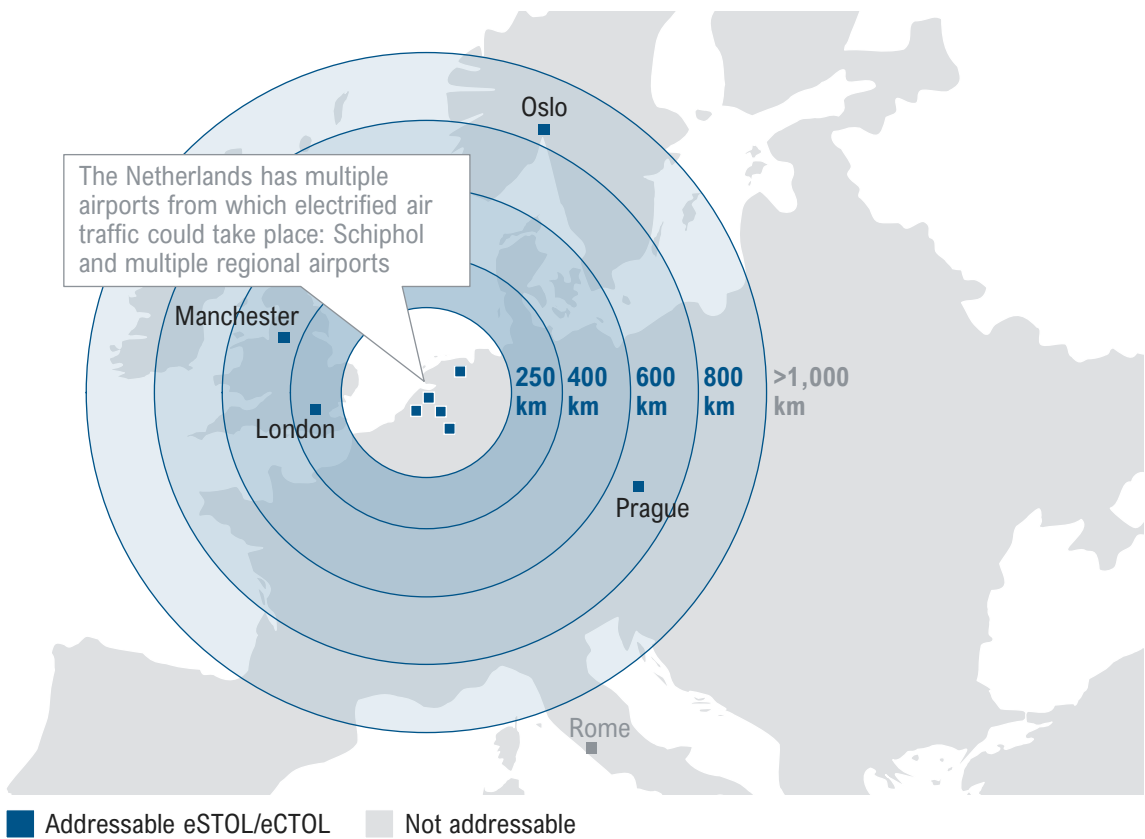

Movements air traffic from and to the Netherlands [k/day]

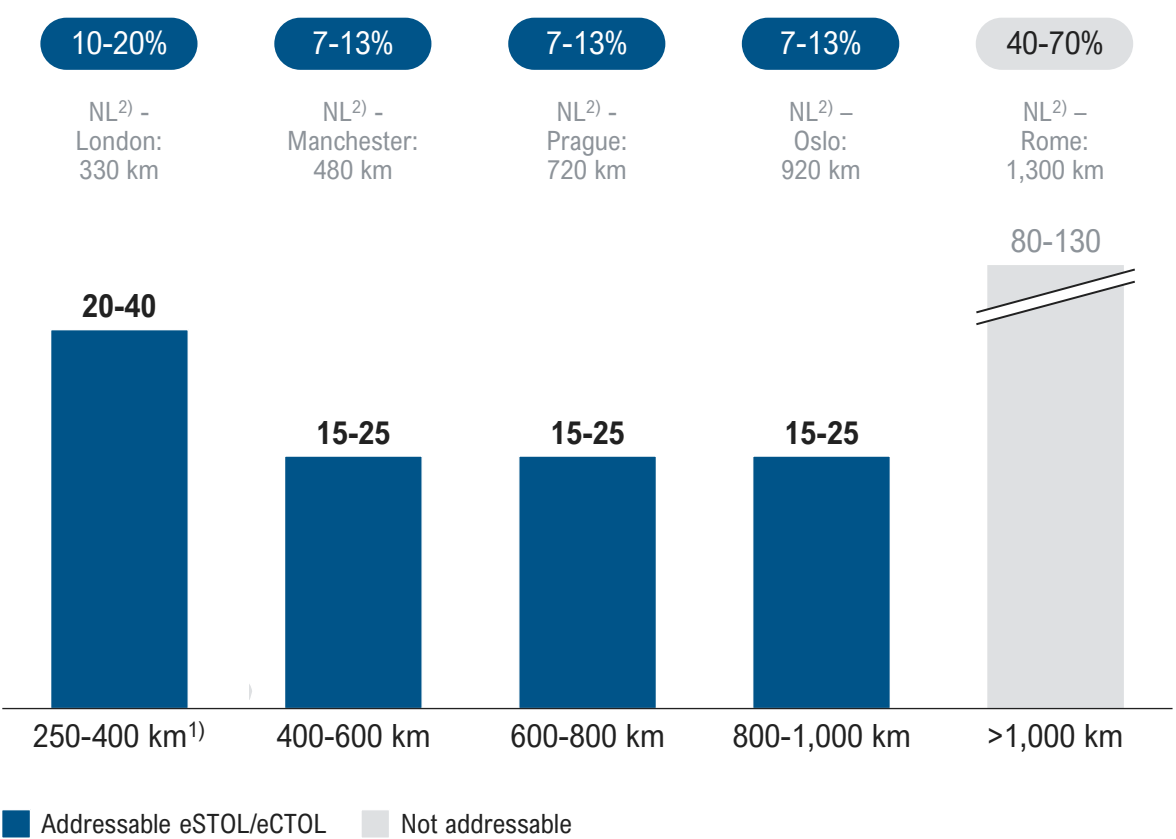

1) Ranges <250 km ignored since air traffic movements in this range are limited; 2) Calculation based on Schiphol

The demand in 2040 is estimated to be 2.5-12 k passengers per day based on the current number of movements and a switch rate between 0% and 20%

Market sizing movements (demand): Air Traffic Electrification

!

Uncertainty: adoption strongly influenced by regulation

Estimation – Assumptions apply

Range	Movements air traffic [k/day]			Example travel	Assumed aircraft	Estimated switch rate	Est. demand 2040 [k movements/day]	
250-400 km ²⁾		20-40	10-20%	NL ³⁾ - London: 330 km, 65 min	eSTOL	5-20%		1.5-6
400-600 km		15-25	7-13%	NL ³⁾ - Manchester: 480 km, 80 min	eSTOL	5-15%		1-3
600-800 km		15-25	7-13%	NL ³⁾ - Prague: 720 km, 85 min	eCTOL	1-10%		0.2-2
800-1,000 km		15-25	7-13%	NL ³⁾ - Oslo: 920 km, 110 min	eCTOL	0-5%		0-1
>1,000 km		80-130	40-70%	NL ³⁾ - Rome: 1,300 km, 130 min	Conventional aircraft	0%	0	Σ 2.5-12 k

Source

Based on 72 m air traffic passengers in the Netherlands in 2019 (CBS) and ~10% share per range assumed¹⁾

Time based on current time required for a direct flight according (website KLM)

Assumption: <600 km: eSTOL (more landing flexibility), >600 km: eCTOL (less energy consumption)

Assumed (excluding potential regulation effects)

1) ~15% for 250-400 km assumed because of large volumes between Amsterdam and London; 2) Ranges <250 km ignored since air traffic movements in this range are limited; 3) Calculation based on Schiphol

60-260 required eSTOLs and eCTOLs are expected for Air Traffic Electrification in 2040 based on the estimated 2.5-12 k eSTOL and eCTOL movements in 2040

Market sizing required aircrafts (supply): Air Traffic Electrification

!

Uncertainty: adoption strongly influenced by regulation

Estimation – Assumptions apply

Range	Est. demand 2040 [k movements/day]	Assumed aircraft	Capacity [passenger]	Occupancy at peak	Turn around time [min]	Required aircrafts in 2040
250-400 km ¹⁾	1.5-6	eSTOL	8	80%	45	30-130
400-600 km	1-3	eSTOL	8	80%	45	30-80
600-800 km	0.2-2	eCTOL	16	80%	45	3-30
800-1,000 km	0-1	eCTOL	16	80%	45	0-20
>1,000 km	0	Conventional aircraft	n.a.	n.a.	n.a.	0
Σ 2.5-12 k						Σ 60-260

Source

Assuming <600 km eSTOL (landing flexibility) and >600 km: eCTOL (range, energy consumption)

8 for eSTOL assumed, 16 for eCTOL (expert interview and Desk research)

Average occupancy of air flights in 2019 (CBS)

~30-60 minutes for charging (expert interviews)

1) Ranges <250 km ignored since air traffic movements in this range are limited



D. Required actions for the government and the top sectors



Ministerie van Infrastructuur
en Waterstaat

The government's key responsibilities are regulation, infrastructure and social-cultural factors while the top sectors must focus on technology and economics

AAM adoption drivers and different roles

	1 Social-cultural	2 Technology	3 Infrastructure	4 Economics	5 Regulation & certification
Criteria	Match with values, views, expectations of consumers, citizens and other stakeholders	Technological development of the aircraft , the propulsion and the control of it	Development of infrastructure (physical and digital) and ground transport integration	Development of unit economics compared to alternatives	Maturity of AAM regulation and certification across regions
Role	Government¹⁾ Top sectors	Government¹⁾ Top sectors	Government¹⁾ Top sectors	Government¹⁾ Top sectors	Government¹⁾ Top sectors

■ Leading role ■ Smaller role (incl. no role)

1) Most likely via the Ministry of Infrastructure and Water Management

There is a longlist of actions required to successfully develop Advanced Air Mobility in The Netherlands and Western Europe

Identified actions

Social-cultural factors 	1 - Facilitate public debate on AAM (e.g. by bringing the right parties together and communicate/inform about the topic) - Engage with local communities and end-users to grasp everyone's interests and opinions - Enlarge capacity at the Ministry and provinces to increase knowledge - Ensure a human capital agenda to develop talent required for AAM (e.g. engineers)	Economics 4 	- Stimulate (technology) investments into the field of AAM - Support innovations and scale to make AAM more cost-competitive versus other mobility types (e.g. via subsidies)
Technology 	2 - Work with high tech (e.g. HTSM¹), energy, aviation and automotive industries to promote innovations in new aircraft technologies, lightweight materials and rapid aircraft charging - Monitor technological developments (e.g. hydrogen and e-fuels) to ensure usage of latest innovations - Ensure knowledge development by building documentation	Regulation & certification 5 	- Organize international collaboration to ensure safely adapting AAM aircraft certification and to develop AAM airspace policies and regulation - Ensure capacity at the regulatory bodies (e.g. EASA) to smoothen and accelerate the regulatory approvals - Specify required certifications and regulations for AAM to be in The Netherlands and Western-Europe (e.g. eco-slots for part of the flight movements)
Infrastructure 	3 - Determine required infrastructure (e.g. vertiports, energy infrastructure) through the Netherlands that supports the realization of required infrastructure (incl. retaining current infrastructure) - Examine how to integrate different air traffic types (i.e. slower vs fast air traffic: AAM vs. conventional aircrafts) - Realize hubs (e.g. vertiport Twente) - Connect stakeholders to interlink road traffic and AAM Leverage strong position of The Netherlands in specific areas (e.g. charging infrastructure)	Over-arching 1-5 	- Develop scenarios in more detail to define how and when AAM affects decision making (incl. effects of potential closure of airports on success of AAM) - Support the development of the AAM ecosystem - Strengthen the position of the Netherlands, but cooperate internationally to leverage knowledge - Identify the added-value of each top sector to AAM - Determine the government's directing function

■ Leading role ■ Smaller role (incl. no role)

1) High Tech Systems & Materials

Concrete next steps are identified for the government and top sectors to accelerate development of Advanced Air Mobility in the short-term

Concrete next steps for the government and top sectors

	Program further research on AAM	• Determine the government's directing function and long-term goals • Define how and when AAM affects decision making • Explore other use cases for AAM (e.g. Waddengebied)	Gov. Top sec. Gov. Top sec. Gov. Top sec.
	Research public opinion on AAM	• Facilitate public debate on AAM, by communicating and informing about the topic • Engage with local communities and end-users to grasp everyone's interests and opinions • Align ambitions with values, views, expectations of consumers, citizens and other stakeholders	Gov. Top sec. Gov. Top sec. Gov. Top sec.
	Bring together relevant stakeholders to accelerate AAM technology development	• Identify the added-value of each top sector to AAM • Triple Helix – academia and knowledge institutes, industry and government • Support development of the AAM ecosystem	Gov. Top sec. Gov. Top sec. Gov. Top sec.
	Stimulate research on AAM	• Support innovation to accelerate AAM development by subsidies • Map existing subsidies that can be used for AAM • Stimulate (technology) investments into the field of AAM	Gov. Top sec. Gov. Top sec. Gov. Top sec.
	Develop required AAM regulations with EASA	• Dutch government can take the lead in Europe regarding AAM regulation & certification • Ensure uniform regulations within Europe	Gov. Top sec. Gov. Top sec.
	Map infrastructure requirements for AAM in NL	• Determine required infrastructure through the Netherlands • Build a roll-out plan that supports the realization of required infrastructure	Gov. Top sec. Gov. Top sec.

Leading role Smaller role (incl. no role)

Roland
Berger

